



Sistema de Fijación Powerlock®


Proceso de Apertura y cierre

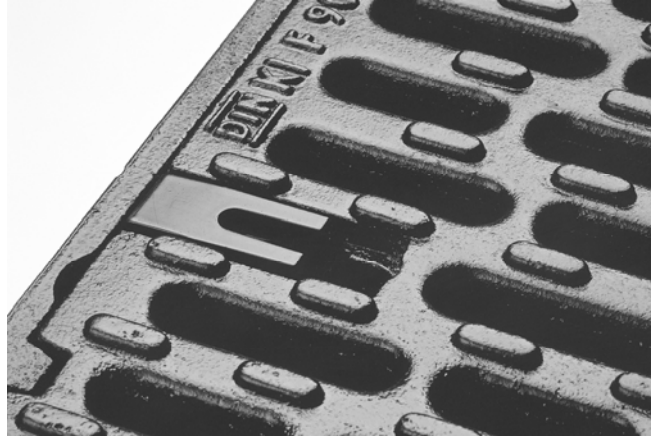

Apertura

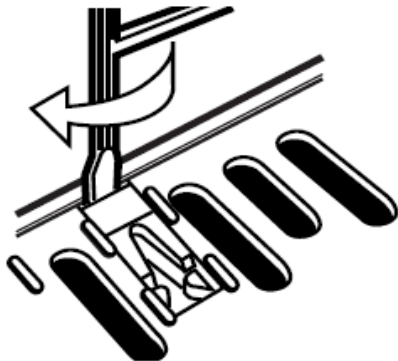

1. To open: slip chamfered end of locking tool into the slot behind the back of the Powerlock mechanism as shown.

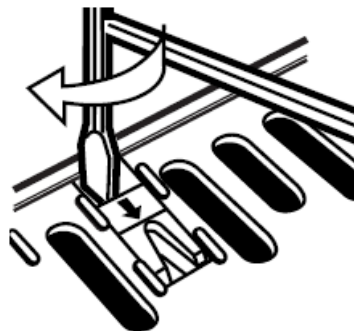

2. Rotate the tool through 90° until the lock mechanism slides across and clicks. Repeat for each lock.

Cierre



3. Lift grating with the hook at the end of the tool.



4. To close: fit one side of grating under lugs in channel rail and lower grating into position. Use the hook on the locking tool in the recess of the lock mechanism to push the clip back towards the closed position, until a click is heard. Repeat for all locks.

ACO Productos Polímeros, S.A.

Pol. Industrial Puigtió, s/n, Apdo. de Correos 84, 17412 Maçanet de la Selva (Girona)
Tel. 972 859 300 Fax 972 859 436 web: www.aco.es e-mail: aco@aco.es